


Ceiling Type Panel Air Conditioner (2.000 W and 4.000 W)

Specifications

- 2 kW and 4 kW cooling capacity
- User-friendly 7" color touch screen and graphic viewer option
- Compact Design with Rack Cabinet
- Winter work kit
- Eco-friendly refrigerant
- High efficiency at full load
- Precision cooling according to return air temperature
- High EER value
- Cools only the rack cabinet instead of the whole room
- No raised floor required
- Wide Working Range (-20 °C +55 °C)
- The outdoor unit connection pipes can come from both sides or the rear of the unit, optionally.
- Optional remote access via Modbus RTU and Modbus TCP/IP
- Soft start possibility with Softstarter option on the compressor

Optional


- Soft starter
- Phase protection relay
- Ec fan
- Heating option with electric heater
- Wide working range with fan speed control
- Modbus
- Manual type

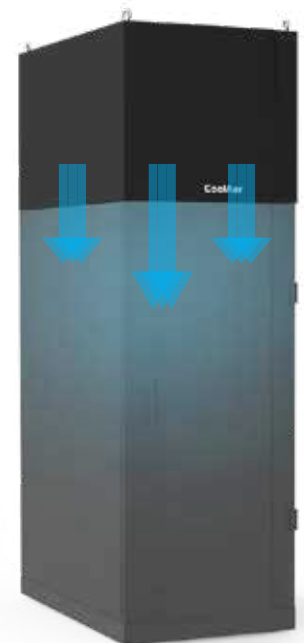

COOLING UNIT TECHNICAL SPECIFICATIONS

Technical Specifications	MCDC 2	MCDC 4
Cooling Capacity	1,9 kW	3,9 kW
Refrigerant	R410A	R410A
Fan Flow	800 m³/h	1600 m³/h
Energy Supply	230V / 1 Ph / 50-60 Hz	230V / 1 Ph / 50-60 Hz
Weight (42U)	135 kg	145 kg
Weight (47U)	144 kg	159 kg
Height x Depth x Width (42U)	1982 x 1000 x 600 (mm)	1982 x 1000 x 600 (mm)
Height x Depth x Width (47U)	2042 x 1200 x 600 (mm)	2042 x 1200 x 600 (mm)
Sound Pressure Level	55 dB(A)	55 dB(A)
Operating Temperature Range	23°C %60 RH	50°C %20 RH

CEILING PANEL AIR CONDITIONER PRODUCT SPECIFICATIONS

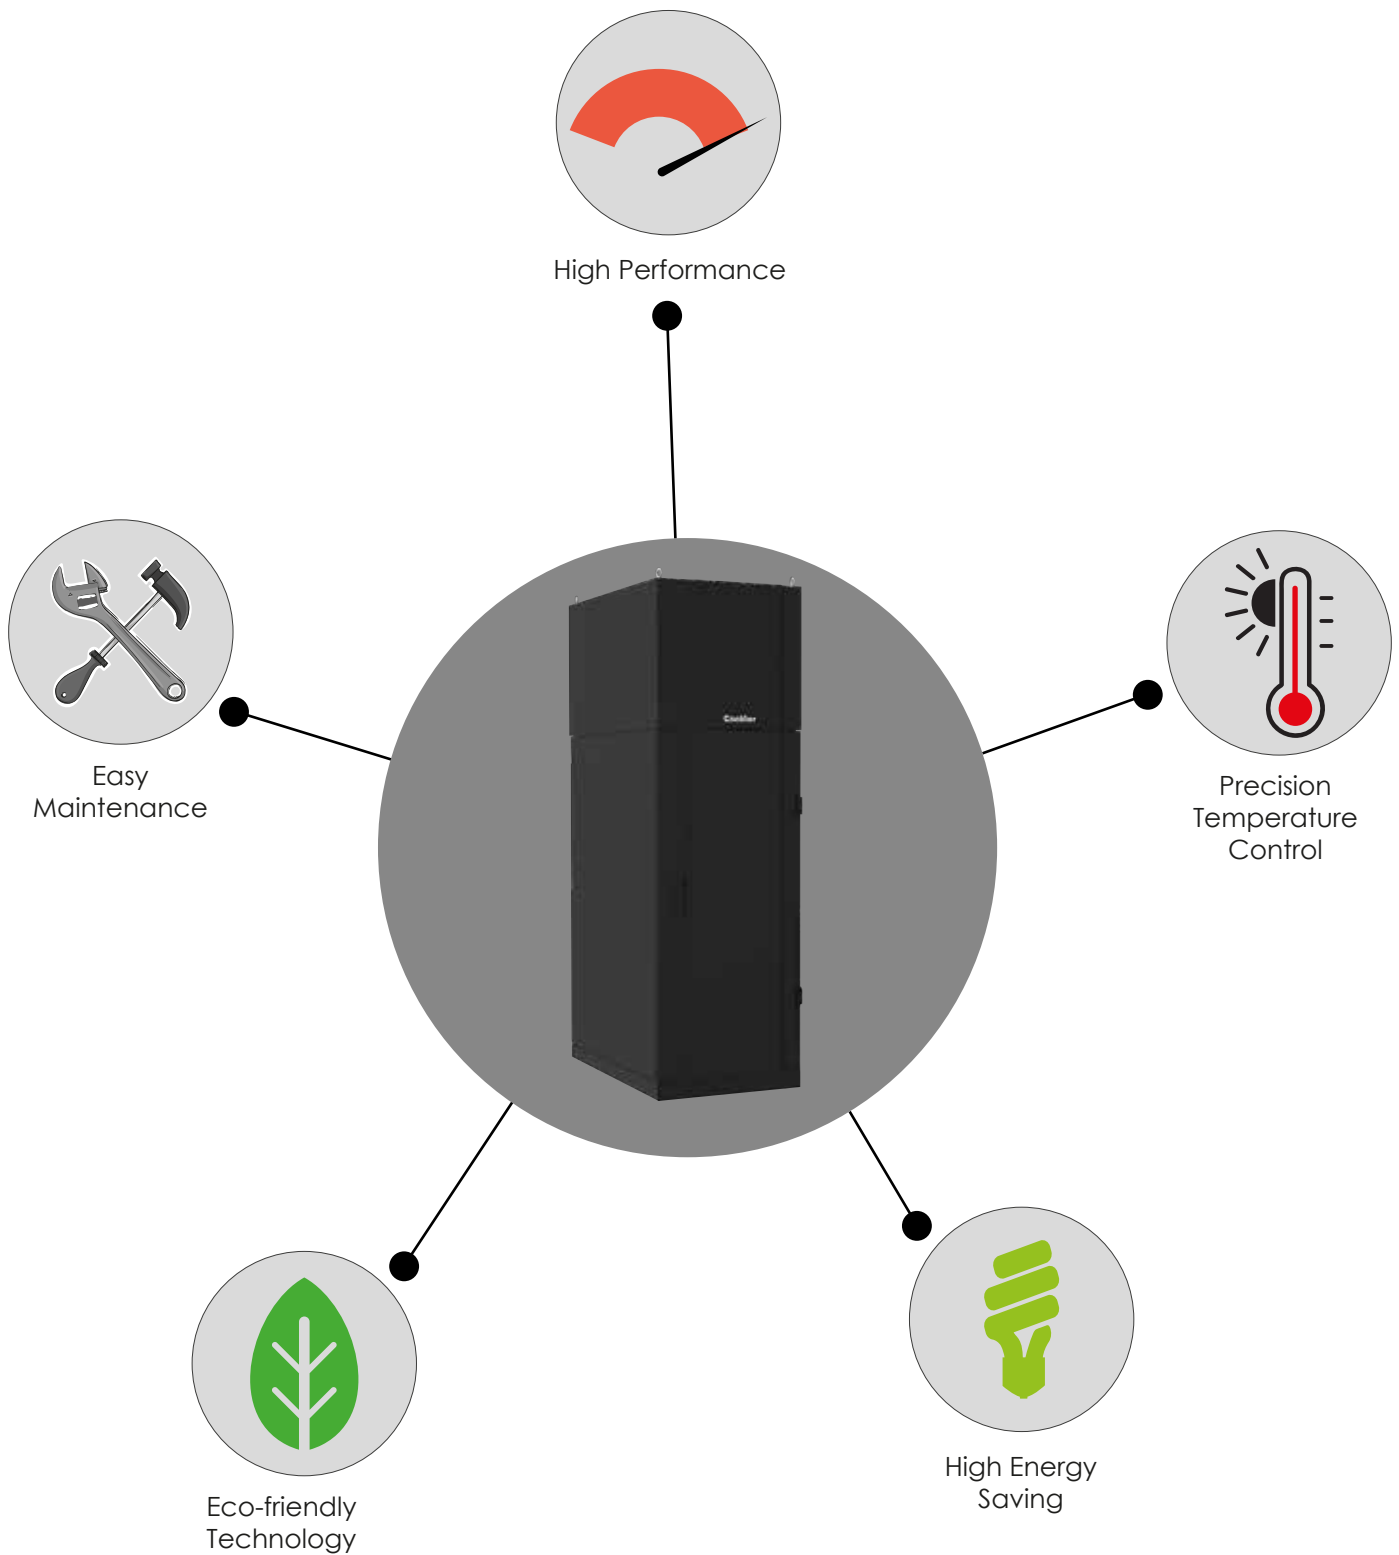

OPTIONAL PRODUCTS

